


PRODUCT BRIEF

Intel® High-Performance SATA Solid-State Drives
NAND Storage Solutions from Intel



Intel® X25-M and X18-M Mainstream SATA Solid-State Drives

34nm NAND Flash Memory Product Line



High-Performance Storage for Notebook and Desktop PCs


Intel® Solid-State Drives represent a revolutionary breakthrough that delivers a giant leap in storage performance. Intel Solid-State Drives are designed to satisfy the most demanding gamers, media creators, and technology enthusiasts. These new drives bring a high level of performance and reliability to notebook and desktop PC storage, at a fraction of the cost of the previous generation of Intel® SSD products.

Wait Less. Do More.

Why wait for a traditional hard disk drive to spin up? Unlike traditional hard disk drives, Intel® Solid-State Drives have no moving parts, resulting in a quiet, cool, highly rugged storage solution that also offers faster system responsiveness. And for notebook PCs, the lower power needs of Intel Mainstream SATA SSDs translate to longer battery life and lighter notebooks. Higher performance with more durability means you can be truly mobile with confidence.

Better by Design

Drawing from decades of memory engineering experience, and new, industry-leading compute-quality 34nm NAND flash memory manufacturing processes, Intel® Mainstream SATA SSDs are designed to deliver outstanding performance, featuring the latest-generation native SATA interface with an advanced architecture employing 10 parallel NAND flash channels equipped

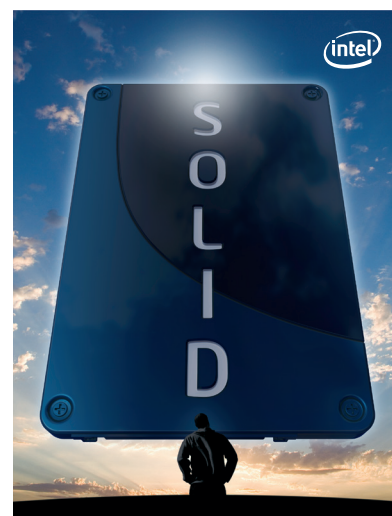

with multi-level cell NAND flash memory. With powerful Native Command Queuing to enable up to 32 concurrent operations, Intel Mainstream SATA SSDs deliver higher input/output per second and throughput performance than other SSDs on the market today—and drastically out-perform traditional hard disk drives. These drives also feature low write amplification and a unique wear-leveling design for higher reliability, meaning Intel drives not only perform better—they last longer.

Two Options. No Worries.

Intel® Mainstream Solid-State Drives are available in either 2.5" (Intel® X25-M) or 1.8" (Intel® X18-M) standard hard drive form factors. And all Intel Mainstream SSDs are tested and validated on the latest Intel-based notebook and desktop platforms for your peace of mind.

Intel® Mainstream SATA Solid-State Drive (34nm NAND Flash Memory Product Line)

Technical Specifications	
Model Name	Intel® X18-M Mainstream SATA Solid-State Drive Intel® X25-M Mainstream SATA Solid-State Drive
Capacity	80 GB and 160 GB
NAND Flash Components	Intel® Multi-Level Cell (MLC) NAND Flash Memory 10 Parallel Channel Architecture with 34nm MLC ONFI 1.0 NAND
Bandwidth	Sustained Sequential Read: up to 250 MB/s Sustained Sequential Write: up to 70 MB/s
Read Latency	65 microseconds
Write Latency	85 microseconds
Random I/O Operations Per Second (IOPS)	Random 4 KB Reads: up to 35,000 IOPS Random 4 KB Writes: <ul style="list-style-type: none">▪ 80 G X25/X18-M - up to 6,600 IOPS▪ 160 G X25/X18-M - up to 8,600 IOPS
Interface	SATA 1.5 Gb/s and 3.0 Gb/s
Form Factor, Height, and Weight	X18-M: 1.8" Industry Standard Hard Drive Form Factor <ul style="list-style-type: none">▪ 5 mm - 35 grams +/- 2 grams X25-M: 2.5" Industry Standard Hard Drive Form Factor <ul style="list-style-type: none">▪ 7 mm - 76 grams +/- 2 grams▪ 9.5 mm - 80 grams +/- 2 grams
Compatibility	SATA revision 2.6 compliant. Compatible with SATA 3 Gb/s with Native Command Queuing and SATA 1.5 Gb/s interface rates
Life Expectancy	1.2 million hours Mean Time Before Failure (MTBF)
Power Consumption	Active: 150 mW Typical (PC workload ¹) Idle (DIPM): 75 mW Typical
Operating Shock	1,500 G/0.5 ms
Operating Temperature	0°C to +70°C
RoHS and Halogen Free Compliance	Meets the requirements of EU Lead Free and Halogen Free Compliance Directives
Product Health Monitoring	Self-Monitoring, Analysis and Reporting Technology (SMART) commands, plus additional SSD monitoring

Solid-State Computing Starts with Intel® Inside. For more information, visit www.intel.com/go/ssd

¹ Active power is measured during execution of MobileMark 2007 Productivity 2007 benchmark. Drive will initiate DIPM request to the host if idle for 25 msec whether or not standby or sleep command is received. If DIPM request is acknowledged drive will enter idle power mode.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. UNLESS OTHERWISE AGREED IN WRITING BY INTEL, THE INTEL PRODUCTS ARE NOT DESIGNED NOR INTENDED FOR ANY APPLICATION IN WHICH THE FAILURE OF THE INTEL PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information.


The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request. Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order. Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or by visiting Intel's Web site at www.intel.com.

Copyright © 2009 Intel Corporation. All rights reserved. Intel and the Intel logo are trademarks of Intel Corporation in the U.S. and other countries.

*Other names and brands may be claimed as the property of others.

Printed in USA

0709/SD/IHBD/PDF

 Please Recycle

322208-001US

